# **Technical data sheet**

## Description:

Sturdy PE-coated PET fabric tape, coated on one side with synthetic rubber adhesive.



#### Application:


Protects and marks; covers during sandblasting work; waterproof packaging with superior

#### **Technical details**

| Core                           | PE-coated cloth |
|--------------------------------|-----------------|
| Total thickness                | 0,30            |
| Adhesive base                  | rubber          |
| Adhesion N / cm                | 6               |
| Adhesive force h / 23°         | 10              |
| Tear resistance N / cm         | 72              |
| Ultimate elongation %          | 10              |
| Temperature resistance 1h / °C | -30 up to +70   |
| UV resistance                  | limited         |
| Weather resistance             | good            |
| Colour                         | red             |
| Core ø mm                      | 76              |
| Storage stability -18°C / 55%  | 24 month        |

The related test methods are based on recognised standards - such as DIN, AFERA, FINAT, PSTC - or internal test methods which are available on request.

### **Product construction:**

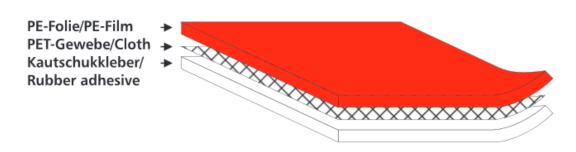

### Please note:

All technical specifications are average values. The usability should be determined through appropriate experiments. We reserve the right to make any changes in the scope of technical advances to improve the performance of the product.